

SE-6-300-G1T

Triac Constant Current

Triac/ELV, PWM,6W, C. Current Dimmable Driver, 300mA, DC:9-21Vdc, EFF>70%, IP20, 5yrs Warranty.



DATA SHEET

MARKETING INFORMATION

| | |
|-------------------|----------------------------------------------------------------------------------|
| Brief Description | Triac/ELV, PWM,6W, C. Current Dimmable Driver, 300mA, DC:9-42Vdc, EFF>70%, IP20. |
|-------------------|----------------------------------------------------------------------------------|

PHYSICAL CHARACTERISTICS

| | |
|---------------|-------|
| Colour Finish | White |
|---------------|-------|

MECHANICAL SPECIFICATION

| | |
|-----------------------|--------|
| Item Nett Weight (kg) | 0.50kg |
| Length (mm) | 84mm |
| Width (mm) | 20mm |
| Height (mm) | 20mm |

ELECTRICAL & SAFETY SPECIFICATION

| | |
|-----------------|--------------------------------|
| Dimmable | Yes - Suitable Dimmer Required |
| Dimmer Included | No |
| IP Rating | IP20 |

SENSOR SPECIFICATION


| | |
|------------------------|----------|
| Working Humidity (%RH) | 20~95%RH |
|------------------------|----------|

QUALITY STANDARDS

| | |
|--------------------|----------|
| Average Life (hrs) | 50000hrs |
| Warranty (yrs) | 5yrs |

LINE DRAWING

Dimensions Unit : mm

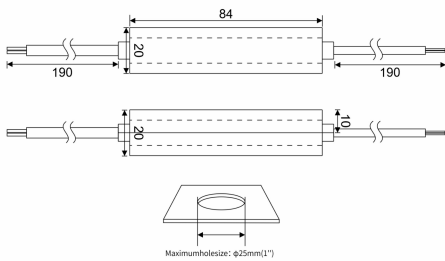

[Click to view the full product details](#)

OVERVIEW

Small size and light weight. The housing is made from V0 flame retardant, Support Leading edge (Triac), Trailing edge (ELV), Innovative thermal management technology intelligently protects the life of the LED driver.

Inspired Lighting Ltd. are continually developing and improving their products. Technical specifications subject to change without prior notice.